

INSTRUCTIONS



Wear safety goggles to protect your eyes.



Wear gloves to protect your hands.



Wear a long-sleeved shirt to protect your arms.



Diesel Injection Service: 2017 & Newer Ford 6.7L Power Stroke

Adaptors needed to perform Wynn's Diesel Fuel Injection Service:




To perform a Wynn's Diesel Injection Service on 2017 & newer Ford 6.7L Power Stroke Engines:

1. Locate the fuel filter feed on the engine
2. Disconnect the feed line from the housing.
3. Connect the 1/2 female adaptor to the filter housing
4. Connect the 1/2 male adaptor to the feed line

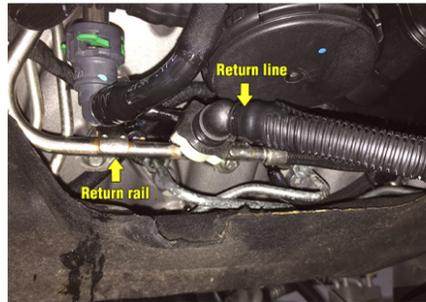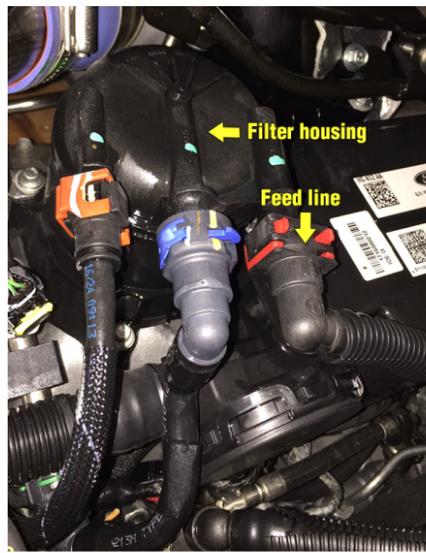

Locate the fuel return line and return rail:

1. Disconnect the line and connect the 3/8 female adaptor to the metal return rail.
2. Connect the 3/8 male adaptor to the return line.
3. Use loop hose, to loop the feed and return lines coming from the tank.
4. Connect the black feed hose from the Wynn's Diesel tool to the filter housing.
5. Connect the red return hose from the Wynn's Diesel tool to the metal return rail.
6. Pressurize the Wynn's Diesel tool to 15 PSI and perform the Wynn's Diesel Injection Service.
7. Disconnect the Wynn's Diesel tool from the vehicle, remove all adaptors.
8. Re-connect feed line and return line.
9. Start the engine and check for leaks.

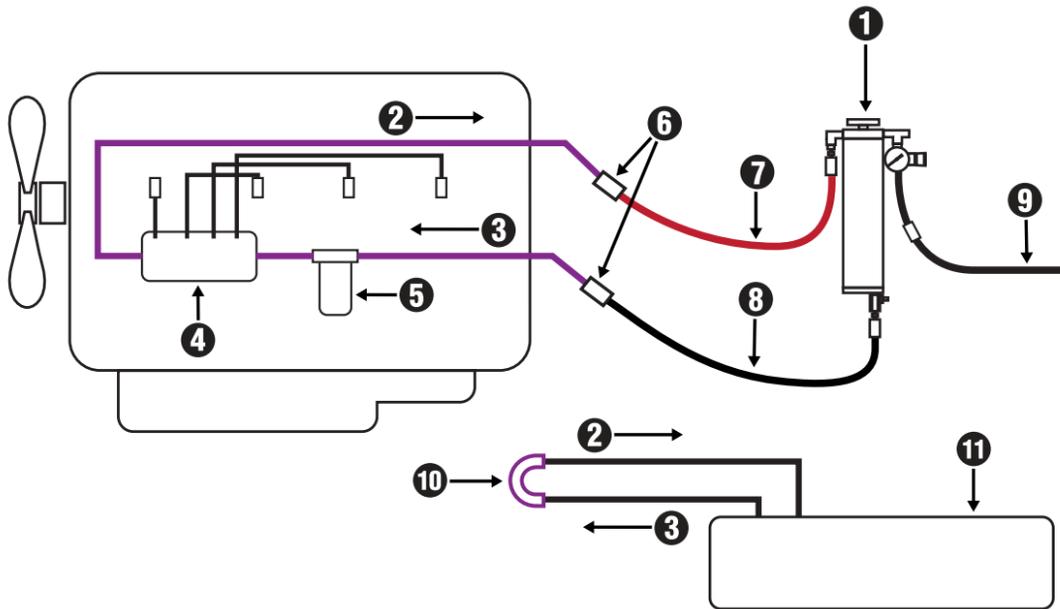

1. Wynn's Diesel tool
2. Return
3. Supply
4. Injector pump
5. Fuel filter
6. Connections
7. Red
8. Black
9. Air supply
10. Loop supply and return lines
11. Fuel tank

